



www.FanAir.com

FanAir Company

FanAir Company
PO BOX 2556
Orange, CA 92859

Ph: (714) 744-6444
Fx: (714) 744-5100
E-Mail sales@fanair.com

Manufacturers representatives for quality industrial air moving equipment.

FAN / BLOWER PRICE INQUIRY FORM

Form with two columns: REQUESTED BY (NAME, COMPANY, PHONE, FAX) and PROJECT DATA (JOB NAME, JOB NO., INSTALLATION - CITY, ST.)

FAN INSTALLATION DATA

Form for fan installation data including application, area classification, elevation, max noise level, mounting, ducted, duty, and location options.

FAN PERFORMANCE DATA

Form for fan performance data including air volume, static pressure, total pressure, average operating temperature, maximum airstream temperature, air chemistry, and material content.



www.FanAir.com

FanAir Company

FanAir Company  
PO BOX 2556  
Orange, CA 92859

Ph: (714) 744-6444  
Fx: (714) 744-5100  
E-Mail sales@fanair.com

Manufacturers representatives for quality industrial air moving equipment.

FAN ACCESSORIES

ROTATION: \_\_\_\_\_ DISCHARGE POSITION: \_\_\_\_\_ MOTOR POSITION: \_\_\_\_\_

DRIVE METHOD:  DIRECT DRIVE  DIRECT COUPLED  BELT DRIVE

CONSTANT SPEED V- BELT  ADJUSTABLE SPEED V- BELT

FLANGED INLET - DRILLED PER:  FACTORY STD  ANSI STD 125/150 LB  PS 15-69

INLET SAFETY SCREEN  INLET FILTER  INLET DAMPER  INLET SILENCER.

INLET DAMPER  INTERNAL  HEAVY-DUTY EXTERNAL  INLET BOX DAMPER

FLANGED OUTLET - DRILLED PER:  FACTORY STD.  ANSI STD 125/150 LB  PS 15-69

OUTLET SAFETY SCREEN  OUTLET DAMPER  EVASE '  OUTLET SILENCER

OUTLET DAMPER  PARALLEL BLADE  OPPOSED BLADE.

SHAFT SEAL - FAN CASING:  NOMINAL LEAKAGE  0 %LEAKAGE.

DRAIN :  THREADED  FLANGED.

ACCESS DOOR:  QUICK OPEN  FLUSH BOLTED  RAISED BOLTED DOOR POSITION: \_\_\_\_\_

SPARK RESISTANT CONST.  AMCA "A" ALL ALUM.  AMCA "B" WHEEL TYPE  AMCA "C"

DAMPER ACTUATOR:  ELECTRIC \_\_\_\_\_ VOLTS  PNEUMATIC \_\_\_\_\_ PSI

MOTOR/DRIVE WEATHER-COVER.  BELT GUARD  SHAFT GUARD  COUPLING GUARD.

COMMON BASE  NO ISOLATION  WITH ISOLATORS ; ISOLATOR TYPE  SPRING  RUBBER

COATING  STD. GREY ENAMEL  HIGH TEMP  CORROSION RESIST.  OTHER \_\_\_\_\_

SURFACES COATED:  AIRSTREAM  EXTERIOR  OTHER: \_\_\_\_\_

INSULATED HOUSING  HEAT REDUCTION  SOUND REDUCTION  SOUND ENCLOSURE

VIBRATION DETECTOR  0 - SPEED SWITCH  BEARING R.T.D.'S

OTHER ACCESSORIES OR REQUIREMENTS, SPECIFY: \_\_\_\_\_






www.FanAir.com

FanAir Company

FanAir Company  
PO BOX 2556  
Orange, CA 92859

Ph: (714) 744-6444  
Fx: (714) 744-5100  
E-Mail sales@fanair.com

Manufacturers representatives for quality industrial air moving equipment.

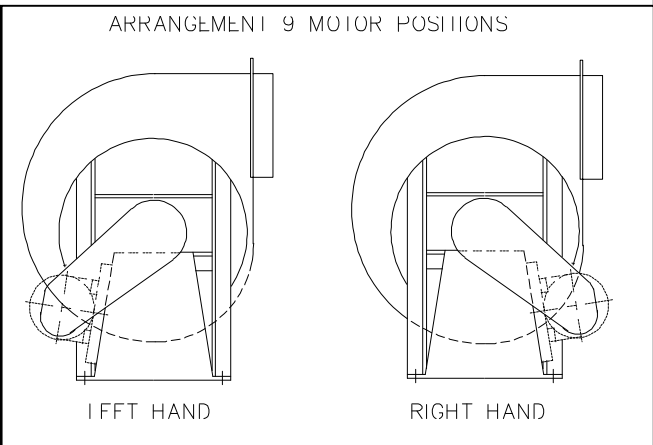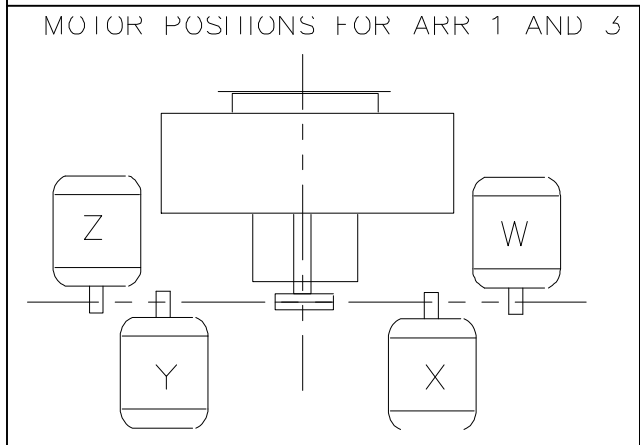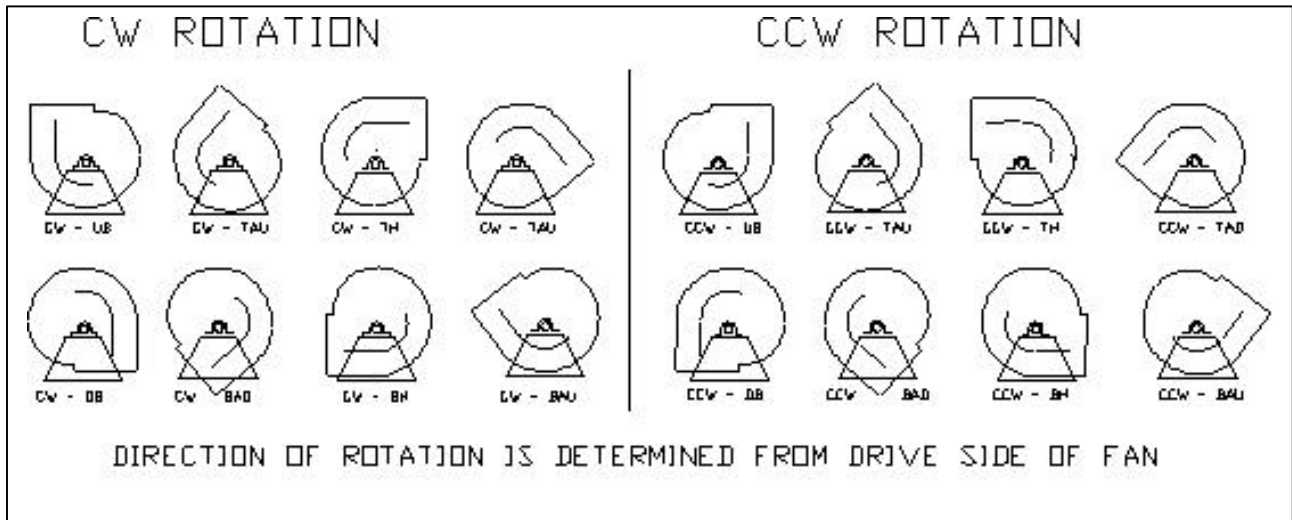

### MOTOR DATA

- ENCLOSURE:  T.E.F.C.  O.D.P.  EXPLOSION PROOF  SEVERE DUTY
- EFFICIENCY  STANDARD EFFICIENCY  PREMIUM EFFICIENCY
- INSULATION  CLASS B  CLASS F  CLASS H  V.P.I.
- AMBIENT  40° C (105° F) OR LESS  OTHER:
- SPEED  SINGLE SPEED  TWO SPEED:  1800/900  1800/1200
- VARIABLE FREQUENCY DRIVE  BY FANAIR  BY OTHERS.
- VOLTAGE:  1-60-115/230V  3-60-200V  3-60-230/460V  3-60-575V JOTHER:
- ACCESSORIES  SPACE HEATER  THERMOSTAT
- OTHER: